




Emcefix

Colour overview

EXPERTISE
CONCRETE COSMETICS



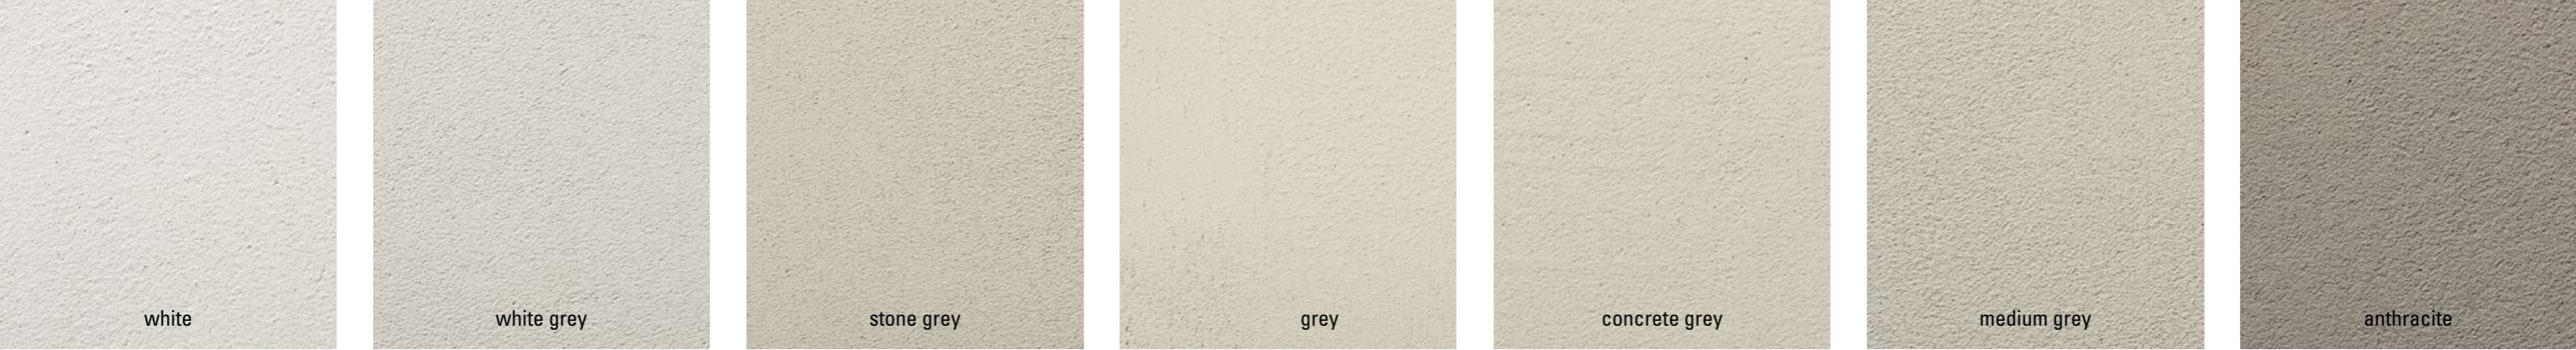

Emcefix-Spachtel F lang

Emcefix

The Emcefix filler range is a complete system consisting of sophisticated polymer enhanced fine and coarse fillers of superior quality. Emcefix fillers give your concrete surfaces a finish that is second to none.

Emcefix systems

Fine and super fine filler	Emcefix-Spachtel F lang / F rapid / F extra fein
Coarse filler	Emcefix-Spachtel G lang / G rapid / G ultra
Primer	Emcefix-Haftbrücke (integrated in G ultra)
Substrate*	concrete

* The substrate must be suitably rough, clean, firm, stable and free from materials that may impair bonding. The substrate must be pre-wetted so that area is moist but still absorbent.



Emcefix-Spachtel G
Non-pigmented coarse fillers for single-layer thicknesses from **6 to 25 / 40 mm** for the reprofiling of deep break-outs.

- Emcefix-Spachtel G lang**
- Workability time (at 20 °C) approx. 20 min.
 - For small scale areas/breakages $\leq 1\text{m}^2$
 - For single layer applications of 5 mm up to 25 mm

- Emcefix-Spachtel G rapid**
- Workability time (at 10 °C) approx. 10 min.
 - For small scale areas/breakages $\leq 1\text{m}^2$
 - For single layer applications of 5 mm up to 6 - 25 mm

- Emcefix-Spachtel G ultra**
- Fibre-reinforced with integrated bonding agent
 - For small scale areas/breakages $\geq 1\text{m}^2$
 - For single layer applications of 5 mm up to 6 - 40 mm



Emcefix-Spachtel F
Coloured fine filler for layer thicknesses depending on the product from **0.5 / 1 to 3 / 6 mm** for a fine surface finish.

- Emcefix-Spachtel F lang**
- Workability time (at +20 °C) approx. 30 Min.
 - For single layer applications of 1 - 6 mm
 - For small and large area filling works

- Emcefix-Spachtel F rapid**
- Workability time (at +10 °C) approx. 15 Min.
 - For single layer applications of 1 - 6 mm
 - For small area filling works

- Emcefix-Spachtel F extra fein**
- Workability time (at +20 °C) approx. 30 Min.
 - For single layer applications of 0,5 - 3 mm
 - For small and large area filling works

Please take note: Colours may deviate from those on the colour overview due to technical reasons to do with printing and the material of the substrate. Please test the colour first on a sample patch. The colour can only be accurately assessed when fully dry. For further information about application and product properties, please refer to our concrete cosmetics process manual and the technical data sheets. Prior to application of the products please refer to the technical and safety data sheets.

Emcefix-Spachtel F rapid



Emcefix-Spachtel F extra fein

MC-Bauchemie Müller GmbH & Co. KG
Concrete Industry
Am Kruppwald 1-8
46238 Bottrop, Germany

Phone: +49 2041 101-50
Fax: +49 2041 101-588

CI@mc-bauchemie.com
www.mc-bauchemie.com



BE SURE. BUILD SURE.

Contact details

